Delayed PD Feedback Guaranteed Cost Control for Master-Slave Synchronization of Variable Fractional-Order Lur'e Systems

Zahra Sadat Aghayan

Abstract: **This paper proposes a guaranteed cost proportional-derivative (PD) feedback strategy for synchronizing master-slave variable fractional-order Lur'e systems (VFOLSs) when the systems are subject to input time delays. The design ensures both asymptotic convergence and a guaranteed upper bound on the cost performance. Based on linear matrix inequalities (LMIs) and the Lyapunov-Krasovskii stability approach, sufficient criteria for synchronization are presented. The effectiveness of the proposed control approach is demonstrated via simulation results, which also confirm its practical applicability.**

Keywords: **Variable fractional-order systems, chaotic dynamics, synchronization, guaranteed cost, PD controller.**

I Introduction

The issues of synchronization and control of chaotic systems have attracted considerable research interest owing to their broad applicability in chemical processes, secure communication systems and information technology [1]–[5]. In the context of secure communication, identical chaotic systems are adopted at both the transmitter (master) and receiver (slave) ends. The original signal is first encrypted by adding it to the system's chaotic output at the transmitter. Subsequently, the signal to be transmitted is retrieved at the receiver by subtracting the chaotic output, thereby recovering the original signal through decryption. However, for this process to yield successful and secure communication, the chaotic subsystems at the transmission and reception ends are required to be in complete synchronization. To date, several methods for synchronization have been established, including complete [6], lag [7], projective [8], and projective lag synchronization [9]. The Lur'e dynamical systems are a major class of nonlinear systems, defined by the combination of a linear dynamics in the forward branch and a sector-bounded nonlinearity in the feedback branch [10]. Consequently, the problems of Lur'e system chaos control and synchronization have received substantial research attention in recent years [11]–[13]. Meanwhile, time delay is an inherent phenomenon in real-world implementations and is known to render the dynamical behavior of systems considerably more complex [14], [15]. Recognizing this, the authors of [16] investigated the influence of time delays on the synchronization of Lur'e chaotic systems. Since then, time-delayed chaos synchronization in Lur'e systems has been extensively reported by numerous researchers.

Fractional-order (FO) calculus has emerged as a prominent research topic over the past several decades, experiencing rapid theoretical and practical advancements [17]–[22]. This sustained interest stems largely from its distinct advantages over classical integer-order calculus, particularly in reflecting the memory behavior and inherited characteristics in dynamical systems. As a recent development, variable fractional-order (VFO) calculus has emerged as a generalization of the constant-order fractional framework and has gained considerable attention across a diverse range of disciplines, including materials science, chemistry, and electrochemistry, among others [23]–[24]. For instance, variable-order differential equations have been employed to characterize the history-dependent drag expression in certain physical processes [25], [26]. A key advantage of VFO calculus is having an adaptive memory for describing nonlinear phenomena, which is a valuable tool for simulating spatial or temporal correlation phenomena [27].

FO Lur'e system synchronization has attracted considerable interest in the literature [28]. Notably, the previous findings are not generally valid for VFO systems. The master–slave synchronization of variable fractional-order Lur'e systems (VFOLSs) has also received little attention so far, which forms the central motivation for this paper. A wide variety of theoretical and experimental methods have been established for synchronizing chaotic systems, including linear and active feedback [29], adaptive [30] and impulsive [31] control, back-stepping [32], and sampled-data control [33]. The guaranteed cost control concept, pioneered by Chang and Peng [34], provides a framework for constructing a controller that ensures robust stabilization of systems subject to uncertainty, while ensuring a prescribed level of performance. This methodology has recently been extended to integer- and FO systems [35]–[38]. Considerable research interest has been devoted to chaotic phenomena in FO systems, especially regarding synchronization problems. Several methods have been proposed, including an adaptive scheme [39], sliding mode control [40], and a linear feedback control [41]. Owing to

Manuscript received 3 August 2026; revised 24 August 2026; accepted 24 August 2026.

Z.S. Aghayan is with the faculty of engineering, University of Garmsar, Garmsar 35881-15589, Iran (e-mail: z.aghayan@fmgarmsar.ac.ir).

its conceptual simplicity and well-established parameter tuning rules, the proportional-integral-derivative (PID) controllers and their extended forms have become common tools in addressing master-slave synchronization problems [42], [43]. In particular, the proportional-derivative (PD) controller offers the advantages of fast transient response and improved system stability, making it a particularly attractive choice for the problem under consideration [44]–[46]. Finally, to the best of our knowledge, this is the first work that simultaneously addresses VFO, input delay, guaranteed cost PD control, and synchronization of Lur'e systems in a unified framework, a combination of features not reported in the existing literature [47], [48]. Here, the symbol $*$ marks the symmetric component of a matrix, $\lambda_{\max}(X)$ gives the maximum real eigenvalue part, and $(\cdot)^T$ denotes transposition. The notation ${}^C\mathcal{D}^\nu$ is used throughout this paper as a shorthand for the variable-order Caputo derivative ${}^C\mathcal{D}^{\nu(t)}$.

II Mathematical Foundations

Definition 1 [49]: For $0 < \nu < 1$, the Caputo definition of the VFO derivative for $\varkappa(t)$ is given by:

$$ {}^C\mathcal{D}^\nu \varkappa(t) = \frac{1}{\Gamma(1-\nu)} \int_0^t (t-\theta)^{-\nu} \varkappa'(\theta) d\theta $$

in which $\Gamma(\theta) = \int_0^\infty t^{\theta-1} e^{-t} dt$ represents the Gamma function, and $\varkappa(t)$ is continuous throughout its domain.

Definition 2 [50]: The concept of guaranteed cost control is defined as follows. If a positive scalar J^* and a stabilizing control input $u^*(t)$ can be found such that $J < J^*$, then $u^*(t)$ is termed the guaranteed cost controller and J^* is the corresponding guaranteed cost bound.

Lemma 1 [51]: Define $\mathcal{Z}(t) \in \mathbb{R}^n$ as a differentiable vector-valued function with $\nu \in (0,1)$. The following relationship holds:

$$ {}^C\mathcal{D}^\nu (\mathcal{Z}^T(t) \Psi \mathcal{Z}(t)) \leq 2\mathcal{Z}^T(t) \Psi ({}^C\mathcal{D}^\nu \mathcal{Z}(t)) $$

where Ψ is an $n \times n$ symmetric positive definite matrix.

Lemma 2 [52]: Let Θ_1, Θ_2, and Θ_3 be given matrices, where $\Theta_1 = {\Theta_1}^T$ and $\Theta_2 > 0$, then $\Theta_1 + {\Theta_3}^T {\Theta_2}^{-1} \Theta_3 < 0$ if and only if

$$ \begin{pmatrix} 1 & {3}^T \\ 3 & -2 \end{pmatrix} < 0 \quad \text{or} \quad \begin{pmatrix} -2 & 3 \\ {3}^T & 1 \end{pmatrix} < 0 $$

Lemma 3 [53]: The following inequality, which will be used in the stability analysis, holds for any vectors a and δ in $\mathbb{R}^n$, and for any positive definite matrix Ω:

$$ \pm 2a^T \delta \leq a^T \Omega a + \delta^T \Omega^{-1} \delta $$

Lemma 4 [54]: For the time delay VFO system

$$ {}^C\mathcal{D}^\nu \mathcal{X}(t) = f(t, \mathcal{X}_t) $$

with $\mathcal{X}_t(\sigma) = \mathcal{X}(t+\sigma)$ for $-\mu_m \leq \sigma \leq 0$, $0 < \nu_{min} \leq \nu \leq \nu_{max} < 1$, the equilibrium point $\mathcal{X} = 0$ is asymptotically stable if there can be found a Lyapunov function $V(t)$ and class-$\mathcal{K}$ functions ϑ_1, ϑ_2, and ϑ_3 for which:

$$ \vartheta_1(\|\mathcal{X}(t)\|) \leq V(t) \leq \vartheta_2(\|\mathcal{X}(t)\|) $$
$$ {}^C\mathcal{D}^\nu V(t) \leq -\vartheta_3(\|\mathcal{X}(t)\|), \quad 0 \leq t $$

III Statement of the Problem

We introduce the following master and slave systems, respectively, regarding the synchronization of VFOLSs.

$$ \text{Master}: \begin{cases} {}^C\mathcal{D}^\nu \eta(t) = \mathcal{A}\eta(t) + \mathcal{H}\mathcal{F}(D\eta(t)) \\ \eta(t) = \psi_m(t), \quad t \in [-\mu, 0] \\ q(t) = \mathcal{C}\eta(t) \end{cases} \tag{1} $$

$$ \text{Slave}: \begin{cases} {}^C\mathcal{D}^\nu Y(t) = \mathcal{A}Y(t) + \mathcal{H}\mathcal{F}(DY(t)) + u(t) \\ Y(t) = \psi_s(t), \quad t \in [-\mu, 0] \\ p(t) = \mathcal{C}Y(t) \end{cases} \tag{2} $$

with a delayed feedback PD control

$$ \begin{aligned} u(t) = K_2({}^C\mathcal{D}^\nu q(t-\mu) - {}^C\mathcal{D}^\nu p(t-\mu)) \\ + K_1(q(t-\mu) - p(t-\mu)) \end{aligned} \tag{3} $$

where $0 < \nu_{\min} \leq \nu \leq \nu_{\max} < 1$, the master has state $\eta(t) \in \mathbb{R}^n$ and output $q(t) \in \mathbb{R}^m$, while the slave is defined by state $Y(t) \in \mathbb{R}^n$ and output $p(t) \in \mathbb{R}^m$. The system matrices $\mathcal{A} \in \mathbb{R}^{n\times n}, \mathcal{H} \in \mathbb{R}^{n\times n_h}, D \in \mathbb{R}^{n_h \times n}$ and $\mathcal{C} \in \mathbb{R}^{m\times n}$ are given constant matrices with suitable sizes. The control law $u(t) \in \mathbb{R}^n$ is applied to the slave system, and the controller gains are represented by $K_1, K_2 \in \mathbb{R}^{n\times l}$. The initial function is specified as $\psi(t) \in C([-\mu, 0], \mathbb{R}^n)$, where $\mu > 0$ denotes the delay.

The nonlinearity $\mathcal{F}(\cdot) : \mathbb{R}^{n_h} \to \mathbb{R}^{n_h}$ is assumed to be a diagonal mapping, where each entry $\mathcal{F}_j(\cdot)$ satisfies a sector constraint in the interval $[0, k_j]$. More precisely, for any a, b and for each $j = 1, 2, \ldots, n_h$, we have:

$$ 0 \leq \frac{\mathcal{F}_j(a) - \mathcal{F}_j(b)}{a-b} \leq {k_j}^+ \tag{4} $$

where $j = 1, 2, ..., \ell$. Let $e(t) = Y(t) - \eta(t)$ denote the master-slave synchronization error. Accordingly, the synchronization error dynamics are described as:

$$ \begin{aligned} {}^C\mathcal{D}^\nu e(t) = \mathcal{A}e(t) + \mathcal{H}g(De(t), \eta(t)) \\ - K_1\mathcal{C}e(t-\mu) - K_2\mathcal{C}{}^C\mathcal{D}^\nu e(t-\mu) \end{aligned} \tag{5} $$

where the nonlinear function $g(De(t), \eta(t)) = \mathcal{F}(D\eta(t) + De(t)) - \mathcal{F}(D\eta(t))$ holds the interval $[0, k_j]$. Then, we have

$$ 0 \leq \frac{\mathcal{F}_j(D_j(e(t) + \eta(t))) - \mathcal{F}_j(D_j\eta(t))}{D_j e(t)} \leq {k_j}^+ \tag{6} $$

where $D_j e(t) \neq 0$, $j = 1, 2, \ldots, \ell$, and D_j represents the j-th row of D. From (6), we directly get:

$$ g_j(D_j e(t), \eta(t)) \left[g_j(D_j e(t), \eta(t)) - {k_j}^+ D_j e(t) \right] \leq 0 \tag{7} $$

We choose the following cost function to be minimized:

$$ \begin{aligned} J = \frac{1}{\Gamma(\nu)} \int_0^{\mathfrak{h}} (\mathfrak{h} - s)^{\nu-1} (e^T(s) Q_1 e(s) \\ + u^T(s) Q_2 u(s)) ds \end{aligned} \tag{8} $$

where $\mathfrak{h} > \mu > 0$ is a given parameter, and Q_1, Q_2 are positive definite symmetric matrices of appropriate dimensions. The objective is to develop a PD controller of the form (3) that enforces asymptotic tracking of the master trajectory by the slave system, thus ensuring master-slave synchronization for the FOLSs in (1) and (2). The task reduces to finding gain matrices K_1 and K_2 thus the system becomes asymptotically stable, meaning the error (5) tends to zero over time and the cost function (8) satisfies the requirement of Definition 2.

IV Stability Criteria

In what follows, we propose a guaranteed cost control strategy to stabilize the error state equation (5).

Theorem: Let us consider the error dynamics (5) associated with the cost matrices that are symmetric and positive definite $Q_1 \in \mathbb{R}^{n\times n}$ and $Q_2 \in \mathbb{R}^{m\times m}$ as in (8). For given scalars μ, $\nu_1 = \nu_{\min}$ and $\nu_2 = \min\{\nu_{\min}, (1-\nu_{\max})\}$, prescribed matrices $K = \mathrm{diag}\{k_1, \ldots, k_{n_h}\}$, positive scalars $\epsilon_1, \epsilon_2, \epsilon_3$, and a positive constant λ, we assume the existence of a matrix $\bar{P} \in \mathbb{R}^{n\times n}$ that is symmetric and positive definite, a positive diagonal matrix $\bar{T} = \mathrm{diag}\{t_1, \ldots, t_{n_h}\} \in \mathbb{R}^{n\times n}$, and matrices $X \in \mathbb{R}^{n\times n}$ and $Z \in \mathbb{R}^{n\times n}$ of suitable sizes satisfying

$$\begin{pmatrix}
\Gamma_{11} & \Gamma_{12} & \Gamma_{13} & \Gamma_{14} & \Gamma_{15} & \bar{P}Q_1 & 0 & 0 \\
* & \Gamma_{22} & \epsilon_1\mathcal{H}\bar{T} & \Gamma_{24} & \Gamma_{25} & 0 & X^T & X^T \\
* & * & -2\bar{T} & \Gamma_{34} & \bar{T}\mathcal{H}^T\epsilon_2 & 0 & 0 & 0 \\
* & * & * & \Gamma_{44} & \Gamma_{45} & 0 & 0 & 0 \\
* & * & * & * & \Gamma_{55} & 0 & 0 & 0 \\
* & * & * & * & * & -Q_1 & 0 & 0 \\
* & * & * & * & * & * & -{Q_2}^{-1} & 0 \\
* & * & * & * & * & * & * & -\lambda^{-1}I \\
* & * & * & * & * & * & * & * \\
* & * & * & * & * & * & * & * \\
* & * & * & * & * & * & * & * \\
* & * & * & * & * & * & * & *
\end{pmatrix}$$

$$\begin{pmatrix}
0 & 0 & \mu^{\nu_2}{\nu_1}^{-1}\bar{P}\mathcal{A}^T & \mu^{\nu_2}{\nu_1}^{-1}\bar{P} \\
0 & 0 & -\mu^{\nu_2}{\nu_1}^{-1}X^T & 0 \\
0 & 0 & \mu^{\nu_2}{\nu_1}^{-1}\bar{T}\mathcal{H}^T & 0 \\
0 & 0 & 0 & 0 \\
Z^T{Q_2}^T & Z^T & -\mu^{\nu_2}{\nu_1}^{-1}Z^T & 0 \\
0 & 0 & 0 & 0 \\
0 & 0 & 0 & 0 \\
0 & 0 & 0 & 0 \\
-\lambda I & 0 & 0 & 0 \\
* & -{Q_2}^{-1} & 0 & 0 \\
* & * & -\mu^{\nu_2}{\nu_1}^{-1}I & 0 \\
* & * & * & -\mu^{\nu_2}{\nu_1}^{-1}I
\end{pmatrix} < 0 \tag{9}$$

where $\Gamma_{11} = \mathcal{A}\bar{P} + \bar{P}\mathcal{A}^T$, $\Gamma_{12} = -X + \bar{P}\mathcal{A}^T\epsilon_1$, $\Gamma_{13} = \mathcal{H}\bar{T} + \bar{P}D^TK$, $\Gamma_{14} = \bar{P}\mathcal{A}^T\epsilon_3$, $\Gamma_{15} = -Z + \bar{P}\mathcal{A}^T\epsilon_2$, $\Gamma_{22} = -\epsilon_1X - X^T\epsilon_1$, $\Gamma_{24} = -\epsilon_1\bar{P} - X^T\epsilon_3$, $\Gamma_{25} = -\epsilon_1Z - X^T\epsilon_2$, $\Gamma_{34} = \bar{T}\mathcal{H}^T\epsilon_3$, $\Gamma_{44} = -2\bar{P}\epsilon_3$, $\Gamma_{45} = -\bar{P}\epsilon_2 - \epsilon_3Z$, and $\Gamma_{55} = -\epsilon_2Z - Z^T\epsilon_2$. The proposed guaranteed cost controller (3) is designed with gain matrices

$$\begin{aligned}
K_1 &= X\bar{P}^{-1}\mathcal{C}^T(\mathcal{C}\mathcal{C}^T)^{-1} \\
K_2 &= Z\bar{P}^{-1}\mathcal{C}^T(\mathcal{C}\mathcal{C}^T)^{-1}
\end{aligned} \tag{10}$$

and the resulting guaranteed cost bound is computed as

$$J^* = \lambda_{\max}(\bar{P}^{-1})\|\psi\|^2 \tag{11}$$

Proof: Consider the Lyapunov function

$$V(t) = e^T(t)Pe(t) \tag{12}$$

Taking the fractional derivative of (12) using Lemma 1 yields:

$$\begin{aligned}
&{}^C\mathcal{D}^\nu V(t) + e^T(t)\,Q_1e\,(t) \\
&\quad + (K_1\mathcal{C}e\,(t-\mu) + K_2\mathcal{C}\,{}^C\mathcal{D}^\nu e\,(t-\mu))^T \\
&\quad\quad \times Q_2(K_1\mathcal{C}e\,(t-\mu) + K_2\mathcal{C}\,{}^C\mathcal{D}^\nu e\,(t-\mu)) \\
&\le -2e^{\,T}(t)PK_1\mathcal{C}e\,(t-\mu) \\
&\quad + 2e^{\,T}(t)P\mathcal{A}e\,(t) \\
&\quad + 2e^{\,T}(t)P\mathcal{H}g(De\,(t),\eta(t)) \\
&\quad - 2e^{\,T}(t)PK_2\mathcal{C}{}^C\mathcal{D}^\nu e\,(t-\mu) \\
&\quad + e^T(t)\,Q_1e\,(t) \\
&\quad + e^T(t-\mu)(K_1\mathcal{C})^TQ_2(K_1\mathcal{C})\,e\,(t-\mu) \\
&\quad + e^T(t-\mu)(K_1\mathcal{C})^TQ_2(K_2\mathcal{C})\,{}^C\mathcal{D}^\nu e\,(t-\mu) \\
&\quad + {}^C\mathcal{D}^\nu e^T(t-\mu)\,\mathcal{C}^TK_2{}^TQ_2K_1\mathcal{C}e\,(t-\mu) \\
&\quad + {}^C\mathcal{D}^\nu e^T(t-\mu)\mathcal{C}^TK_2{}^TQ_2K_2\mathcal{C}\,{}^C\mathcal{D}^\nu e(t-\mu)
\end{aligned} \tag{13}$$

From (5), the following expression holds

$$\begin{aligned}
&2(e^T(t-\mu)\epsilon_1 + {}^C\mathcal{D}^\nu e^{\,T}(t-\mu)\epsilon_2 + {}^C\mathcal{D}^\nu e^{\,T}(t)\epsilon_3)P \\
&\quad \times \big(-{}^C\mathcal{D}^\nu e\,(t) + \mathcal{H}g(De\,(t),\eta(t)) \\
&\quad + \mathcal{A}e\,(t) - K_1\mathcal{C}e\,(t-\mu) - K_2\mathcal{C}{}^C\mathcal{D}^\nu e\,(t-\mu)\big) = 0
\end{aligned} \tag{14}$$

From (7), for any diagonal positive matrix,

$$\begin{aligned}
&2\Big[e^T(t)D^TKTg\,(De\,(t),\eta(t)) \\
&\quad - g^T\,(De\,(t),\eta(t))\,Tg\,(De\,(t),\eta(t))\Big] \ge 0
\end{aligned} \tag{15}$$

holds. In addition, for any real matrices R_{12}, $R_{11} = {R_{11}}^T$ and $R_{22} = {R_{22}}^T$, that satisfy

$$R = \begin{pmatrix} R_{11} & R_{12} \\ * & R_{22} \end{pmatrix} \ge 0 \tag{16}$$

we have

$$\mu^{\nu_2}{\nu_1}^{-1}\Lambda^T(t)R\Lambda(t) - \int_{t-\mu}^{t}(t-\kappa)^{\nu-1}\Lambda^T(t)R\Lambda(t)d\kappa \ge 0 \tag{17}$$

where $\Lambda^T(t) = \left[e^T(t),\ \mathcal{D}^\nu e^T(t)\right]$. To simplify the calculations, let $R_{11} = R_{22} = I, R_{12} = 0$. Integrating (13) with (14), (15) and (17) yields

$$
\begin{aligned}
&{}^{C}\mathcal{D}^{\nu}V(t)+e^{T}(t)\,Q_1 e\,(t)\\
&\quad+\left(K_1\mathcal{C}e\,(t-\mu)+K_2\mathcal{C}\,{}^{C}\mathcal{D}^{\nu}e\,(t-\mu)\right)^{T}\\
&\qquad\times Q_2(K_1\mathcal{C}e\,(t-\mu)+K_2\mathcal{C}\,{}^{C}\mathcal{D}^{\nu}e\,(t-\mu))\\
&\leq 2e^{\,T}(t)P\mathcal{H}g(De\,(t),\eta(t))\\
&\quad+2e^{\,T}(t)P\mathcal{A}e\,(t)\\
&\quad-2e^{\,T}(t)PK_1\mathcal{C}e\,(t-\mu)\\
&\quad-2e^{\,T}(t)PK_2\mathcal{C}^{C}\mathcal{D}^{\nu}e\,(t-\mu)\\
&\quad+e^{T}(t)\,Q_1 e\,(t)\\
&\quad+e^{T}(t-\mu)(K_1\mathcal{C})^{T}Q_2(K_1\mathcal{C})\,e\,(t-\mu)\\
&\quad+e^{T}(t-\mu)(K_1\mathcal{C})^{T}Q_2(K_2\mathcal{C})\,{}^{C}\mathcal{D}^{\nu}e\,(t-\mu)\\
&\quad+{}^{C}\mathcal{D}^{\nu}e^{T}(t-\mu)\,\mathcal{C}^{T}K_2{}^{T}Q_2K_1\mathcal{C}e\,(t-\mu)\\
&\quad+{}^{C}\mathcal{D}^{\nu}e^{T}(t-\mu)\mathcal{C}^{T}K_2{}^{T}Q_2K_2\mathcal{C}\,{}^{C}\mathcal{D}^{\nu}e(t-\mu)\\
&\quad+2e^{T}(t)D^{T}KTg\,(De\,(t),\eta(t))\\
&\quad-2g^{T}\,(De\,(t),\eta(t))\,Tg\,(De\,(t),\eta(t))\\
&\quad-2e^{T}(t-\mu)\epsilon_1P\,{}^{C}\mathcal{D}^{\nu}e\,(t)\\
&\quad+2e^{T}(t-\mu)\epsilon_1P\mathcal{A}e\,(t)\\
&\quad+2e^{T}(t-\mu)\epsilon_1P\mathcal{H}g(De\,(t),\eta(t))\\
&\quad-2e^{T}(t-\mu)\epsilon_1PK_1\mathcal{C}e\,(t-\mu)\\
&\quad-2e^{T}(t-\mu)\epsilon_1PK_2\mathcal{C}^{C}\mathcal{D}^{\nu}e\,(t-\mu)\\
&\quad-2\,{}^{C}\mathcal{D}^{\nu}e^{\,T}(t-\mu)\epsilon_2P^{C}\mathcal{D}^{\nu}e\,(t)\\
&\quad+2\,{}^{C}\mathcal{D}^{\nu}e^{\,T}(t-\mu)\epsilon_2P\mathcal{A}e\,(t)\\
&\quad+2\,{}^{C}\mathcal{D}^{\nu}e^{\,T}(t-\mu)\epsilon_2P\mathcal{H}g(De\,(t),\eta(t))\\
&\quad-2\,{}^{C}\mathcal{D}^{\nu}e^{\,T}(t-\mu)\epsilon_2PK_1\mathcal{C}e\,(t-\mu)\\
&\quad-2\,{}^{C}\mathcal{D}^{\nu}e^{\,T}(t-\mu)\epsilon_2PK_2\mathcal{C}^{C}\mathcal{D}^{\nu}e\,(t-\mu)\\
&\quad-2\,{}^{C}\mathcal{D}^{\nu}e^{\,T}(t)\epsilon_3P^{C}\mathcal{D}^{\nu}e\,(t)\\
&\quad+2\,{}^{C}\mathcal{D}^{\nu}e^{\,T}(t)\epsilon_3P\mathcal{A}e\,(t)\\
&\quad+2\,{}^{C}\mathcal{D}^{\nu}e^{\,T}(t)\epsilon_3P\mathcal{H}g(De\,(t),\eta(t))\\
&\quad-2\,{}^{C}\mathcal{D}^{\nu}e^{\,T}(t)\epsilon_3PK_1\mathcal{C}e\,(t-\mu)\\
&\quad-2\,{}^{C}\mathcal{D}^{\nu}e^{\,T}(t)\epsilon_3PK_2\mathcal{C}^{C}\mathcal{D}^{\nu}e\,(t-\mu)\\
&\quad+\mu^{\nu_2}{\nu_1}^{-1}e^{T}(t)e(t)\\
&\quad+\mu^{\nu_2}{\nu_1}^{-1}e^{T}(t)\mathcal{A}^{T}\mathcal{A}e(t)\\
&\quad+\mu^{\nu_2}{\nu_1}^{-1}e^{T}(t)\mathcal{A}^{T}\mathcal{H}g\,(De(t),\eta(t))\\
&\quad-\mu^{\nu_2}{\nu_1}^{-1}e^{T}(t)\mathcal{A}^{T}K_1\mathcal{C}e(t-\mu)\\
&\quad-\mu^{\nu_2}{\nu_1}^{-1}e^{T}(t)\mathcal{A}^{T}K_2\mathcal{C}^{C}\mathcal{D}^{\nu}e(t-\mu)\\
&\quad+\mu^{\nu_2}{\nu_1}^{-1}g^{T}\,(De(t),\eta(t))\,\mathcal{H}^{T}\mathcal{A}e(t)\\
&\quad+\mu^{\nu_2}{\nu_1}^{-1}g^{T}\,(De(t),\eta(t))\,\mathcal{H}^{T}\mathcal{H}g\,(De(t),\eta(t))\\
&\quad-\mu^{\nu_2}{\nu_1}^{-1}g^{T}\,(De(t),\eta(t))\,\mathcal{H}^{T}K_1\mathcal{C}e(t-\mu)\\
&\quad-\mu^{\nu_2}{\nu_1}^{-1}g^{T}\,(De(t),\eta(t))\,\mathcal{H}^{T}K_2\mathcal{C}^{C}\mathcal{D}^{\nu}e(t-\mu)\\
&\quad-\mu^{\nu_2}{\nu_1}^{-1}e^{T}(t-\mu)(K_1\mathcal{C})^{T}\mathcal{A}e(t)\\
&\quad-\mu^{\nu_2}{\nu_1}^{-1}e^{T}(t-\mu)(K_1\mathcal{C})^{T}\mathcal{H}g\,(De(t),\eta(t))\\
&\quad+\mu^{\nu_2}{\nu_1}^{-1}e^{T}(t-\mu)(K_1\mathcal{C})^{T}K_1\mathcal{C}e(t-\mu)\\
&\quad+\mu^{\nu_2}{\nu_1}^{-1}e^{T}(t-\mu)(K_1\mathcal{C})^{T}K_2\mathcal{C}^{C}\mathcal{D}^{\nu}e(t-\mu)
\end{aligned}
\tag{18}
$$

$$
\begin{aligned}
&\quad-\mu^{\nu_2}{\nu_1}^{-1}\mathcal{D}^{\nu}e^{T}(t-\mu)(K_2\mathcal{C})^{T}\mathcal{A}e(t)\\
&\quad-\mu^{\nu_2}{\nu_1}^{-1}\mathcal{D}^{\nu}e^{T}(t-\mu)(K_2\mathcal{C})^{T}\mathcal{H}g\,(De(t),\eta(t))\\
&\quad+\mu^{\nu_2}{\nu_1}^{-1}\mathcal{D}^{\nu}e^{T}(t-\mu)(K_2\mathcal{C})^{T}K_1\mathcal{C}e(t-\mu)\\
&\quad+\mu^{\nu_2}{\nu_1}^{-1}\mathcal{D}^{\nu}e^{T}(t-\mu)(K_2\mathcal{C})^{T}K_2\mathcal{C}^{C}\mathcal{D}^{\nu}e(t-\mu)\\
&\quad-\int_{t-\mu}^{t}(t-\kappa)^{\nu-1}\Lambda^{T}(t)R\Lambda(t)d\kappa\\
&\quad-\int_{t-\mu}^{t}(t-\kappa)^{\nu-1}\Lambda^{T}(t)R\Lambda(t)d\kappa
\end{aligned}
$$

Applying Lemma 3, it yields

$$
\begin{aligned}
&e^{T}(t-\mu)(K_1\mathcal{C})^{T}Q_2(K_2\mathcal{C})\,{}^{C}\mathcal{D}^{\nu}e\,(t-\mu)\\
&\quad+{}^{C}\mathcal{D}^{\nu}e^{T}(t-\mu)\mathcal{C}^{T}K_2{}^{T}Q_2K_1\mathcal{C}e(t-\mu)\\
&\leq e^{T}(t-\mu)\mathcal{C}^{T}K_1{}^{T}\lambda K_1\mathcal{C}e(t-\mu)\\
&\quad+{}^{C}\mathcal{D}^{\nu}e^{T}(t-\mu)\mathcal{C}^{T}K_2{}^{T}Q_2{}^{T}\lambda^{-1}Q_2K_2\mathcal{C}\,{}^{C}\mathcal{D}^{\nu}e\,(t-\mu)
\end{aligned}
\tag{19}
$$

Integrating (19) with (18) yields

$$
\begin{aligned}
&{}^{C}\mathcal{D}^{\nu}V(t)+e^{T}(t)\,Q_1 e\,(t)\\
&\quad+\left(K_1\mathcal{C}e\,(t-\mu)+K_2\mathcal{C}\,{}^{C}\mathcal{D}^{\nu}e\,(t-\mu)\right)^{T}\\
&\qquad\times Q_2(K_1\mathcal{C}e\,(t-\mu)+K_2\mathcal{C}\,{}^{C}\mathcal{D}^{\nu}e\,(t-\mu))\\
&\leq\varpi^{T}(t)\,\Omega\varpi\,(t)-\int_{t-\mu}^{t}(t-\kappa)^{\nu-1}\Lambda^{T}(t)R\Lambda(t)d\kappa
\end{aligned}
\tag{20}
$$

where

$$
\varpi^{T}(t)=\begin{bmatrix} e^{T}(t) & e^{T}(t-\mu) & g^{T}(De\,(t),\eta(t))\\ & {}^{C}\mathcal{D}^{\nu}e^{T}(t) & {}^{C}\mathcal{D}^{\nu}e^{T}(t-\mu)\ \end{bmatrix}
\tag{21}
$$

$$
\Omega=\begin{pmatrix}
\Omega_{11} & \Omega_{12} & \Omega_{13} & \mathcal{A}^{T}\epsilon_3P & \Omega_{15}\\
* & \Omega_{22} & \epsilon_1P\mathcal{H}-\mu^{\nu_2}{\nu_1}^{-1}(K_1\mathcal{C})^{T}\mathcal{H} & \Omega_{24} & \Omega_{25}\\
* & * & -2T+\mu^{\nu_2}{\nu_1}^{-1}\mathcal{H}^{T}\mathcal{H} & \mathcal{H}^{T}\epsilon_3P & \mathcal{H}^{T}\epsilon_2P-\mu^{\nu_2}{\nu_1}^{-1}\mathcal{H}^{T}K_2\mathcal{C}\\
* & * & * & -2\epsilon_3P & -\epsilon_2P-\epsilon_3PK_2\mathcal{C}\\
* & * & * & * & \Omega_{55}
\end{pmatrix}<0
\tag{22}
$$

with

$$
\begin{aligned}
\Omega_{11}&=P\mathcal{A}+\mathcal{A}^{T}P+Q_1+\mu^{\nu_2}{\nu_1}^{-1}I+\mu^{\nu_2}{\nu_1}^{-1}\mathcal{A}^{T}\mathcal{A}\\
\Omega_{12}&=-PK_1\mathcal{C}+\mathcal{A}^{T}\epsilon_1P-\mu^{\nu_2}{\nu_1}^{-1}\mathcal{A}^{T}K_1\mathcal{C}\\
\Omega_{13}&=P\mathcal{H}+D^{T}KT+\mu^{\nu_2}{\nu_1}^{-1}\mathcal{A}^{T}\mathcal{H}\\
\Omega_{22}&=(K_1\mathcal{C})^{T}Q_2(K_1\mathcal{C})+\mathcal{C}^{T}K_1{}^{T}\lambda K_1\mathcal{C}-\epsilon_1PK_1\mathcal{C}\\
&\quad+\mu^{\nu_2}{\nu_1}^{-1}(K_1\mathcal{C})^{T}K_1\mathcal{C}\\
\Omega_{24}&=-\epsilon_1P-\mathcal{C}^{T}K_1{}^{T}\epsilon_3P
\end{aligned}
$$

$$
\begin{aligned}
\Omega_{25} &= -\epsilon_1 P K_2\mathcal{C} - (K_1\mathcal{C})^T \epsilon_2 P + \mu^{\nu_2}{\nu_1}^{-1}(K_1\mathcal{C})^T K_2\mathcal{C} \\
\Omega_{55} &= -\epsilon_2 P K_2\mathcal{C} - \mathcal{C}^T {K_2}^T \epsilon_2 P \\
&\quad + (K_2\mathcal{C})^T {Q_2}^T \lambda^{-1} Q_2 (K_2\mathcal{C}) \\
&\quad + (K_2\mathcal{C})^T Q_2 (K_2\mathcal{C}) \\
&\quad + \mu^{\nu_2}{\nu_1}^{-1}(K_2\mathcal{C})^T K_2\mathcal{C}
\end{aligned}
$$

Using Lemma 2 results in

$$
\begin{pmatrix}
\Theta_{11} & \Theta_{12} & \Theta_{13} & \Theta_{14} & \Theta_{15} & Q_1 & 0 \\
* & \Theta_{22} & \epsilon_1 P\mathcal{H} & \Theta_{24} & \Theta_{25} & 0 & (K_1\mathcal{C})^T \\
* & * & -2T & \mathcal{H}^T\epsilon_3 P & \mathcal{H}^T\epsilon_2 P & 0 & 0 \\
* & * & * & -2\epsilon_3 P & \Theta_{45} & 0 & 0 \\
* & * & * & * & \Theta_{55} & 0 & 0 \\
* & * & * & * & * & -Q_1 & 0 \\
* & * & * & * & * & * & -{Q_2}^{-1} \\
* & * & * & * & * & * & * \\
* & * & * & * & * & * & * \\
* & * & * & * & * & * & * \\
* & * & * & * & * & * & *
\end{pmatrix}
\begin{pmatrix}
0 & 0 & 0 & \mu^{\nu_2}{\nu_1}^{-1}\mathcal{A}^T \\
(K_1\mathcal{C})^T & 0 & 0 & -\mu^{\nu_2}{\nu_1}^{-1}(K_1\mathcal{C})^T \\
0 & 0 & 0 & \mu^{\nu_2}{\nu_1}^{-1}\mathcal{H}^T \\
0 & 0 & 0 & 0 \\
0 & (K_2\mathcal{C})^T {Q_2}^T & (K_2\mathcal{C})^T & -\mu^{\nu_2}{\nu_1}^{-1}(K_2\mathcal{C})^T \\
0 & 0 & 0 & 0 \\
0 & 0 & 0 & 0 \\
-\lambda^{-1} & 0 & 0 & 0 \\
* & -\lambda & 0 & 0 \\
* & * & -{Q_2}^{-1} & 0 \\
* & * & * & -\mu^{\nu_2}{\nu_1}^{-1} I
\end{pmatrix} \tag{23}
$$

where $\Theta_{11} = P\mathcal{A} + \mathcal{A}^T P + \mu^{\nu_2}{\nu_1}^{-1} I$, $\Theta_{12} = -PK_1\mathcal{C} + \mathcal{A}^T\epsilon_1 P$, $\Theta_{13} = P\mathcal{H} + D^T K T$, $\Theta_{14} = \mathcal{A}^T\epsilon_3 P$, $\Theta_{15} = -PK_2\mathcal{C} + \mathcal{A}^T\epsilon_2 P$, $\Theta_{22} = -\epsilon_1 PK_1\mathcal{C} - (K_1\mathcal{C})^T\epsilon_1 P$, $\Theta_{24} = -\epsilon_1 P - \mathcal{C}^T {K_1}^T \epsilon_3 P$, $\Theta_{25} = -\epsilon_1 PK_2\mathcal{C} - (K_1\mathcal{C})^T\epsilon_2 P$, $\Theta_{45} = -\epsilon_2 P - \epsilon_3 PK_2\mathcal{C}$, and $\Theta_{55} = -\epsilon_2 PK_2\mathcal{C} - (K_2\mathcal{C})^T\epsilon_2 P$. Multiplying (23) from the left and right by $\mathrm{diag}\{P^{-1}, P^{-1}, T^{-1}, P^{-1}, P^{-1}, I, I, I, I, I, I\}$, and defining $\bar{P} = P^{-1}$, $\bar{T} = T^{-1}$, $X = K_1\mathcal{C}P^{-1}$, and $Z = K_2\mathcal{C}P^{-1}$. Then, using Lemma 2, the condition (9) is established. Applying Lemma 4 ensures asymptotic stability of the error system (5). Finally, combining (20), (22), and the control law (3) yields the guaranteed cost bound.

$$
\begin{aligned}
{}^C\mathcal{D}^\nu V(t) &\le \varpi^T(t)\,\Omega\varpi\,(t) - e^T(t)\,Q_1 e\,(t) \\
&\quad - u^T(t) Q_2 u\,(t) \\
&\le -(u^T(t) Q_2 u\,(t) + e^T(t)\,Q_1 e\,(t)) \\
&\le 0
\end{aligned} \tag{24}
$$

where

$$
\begin{aligned}
u^T(t) Q_2 u\,(t) =& (K_1\mathcal{C} e\,(t-\mu) + K_2\mathcal{C}\,{}^C\mathcal{D}^\nu e\,(t-\mu))^T \\
&\times Q_2 (K_1\mathcal{C} e\,(t-\mu) + K_2\mathcal{C}\,{}^C\mathcal{D}^\nu e\,(t-\mu))
\end{aligned}
$$

Integrating both sides of (24) with order ν results

$$
V(\mathfrak{h}, e\,(\mathfrak{h})) - V(0, e\,(0)) \le -J(u) \tag{25}
$$

As $V(\mathfrak{h}, e(\mathfrak{h})) \ge 0$, we get

$$
\begin{aligned}
J(u) &\le V(0, e\,(0)) - V(h, e\,(\mathfrak{h})) \\
&\le V(0, e\,(0)) \\
&\le \lambda_{\max}(\bar{P}^{-1})\|\psi\|^2 = J^*
\end{aligned} \tag{26}
$$

V Simulations

The Chua's circuit as a special case of Lur'e systems [55] consisting of a linear part and a sector-bounded nonlinearity, a structure shared by many chaotic systems, which is modeled

$$
\begin{aligned}
{}^C\mathcal{D}^\nu \eta_1 &= a\,(\eta_2 - \eta_1 - g(\eta_1)) \\
{}^C\mathcal{D}^\nu \eta_2 &= \eta_1 - \eta_2 + \eta_3 \\
{}^C\mathcal{D}^\nu \eta_3 &= -b\eta_2
\end{aligned} \tag{27}
$$

Consider the state vectors η_1, η_2, and η_3 denoting the capacitor voltages and the current through the inductor, respectively. $g\,(\eta_1)$ stands for the nonlinear characteristic of Chua's diode, defined explicitly as:

$$
g\,(\eta_1) = m_1\eta_1 + \frac{1}{2}(m_0 - m_1)\;\left(|\eta_1 + 1| - |\eta_1 - 1|\right) \tag{28}
$$

(27) is equivalent to the VFOLSs from with

$$
\mathcal{H} = \begin{bmatrix} -a\,(m_0 - m_1) \\ 0 \\ 0 \end{bmatrix},\; \mathcal{A} = \begin{bmatrix} -a\,m_1 & a & 0 \\ 1 & -1 & 1 \\ 0 & -b & 0 \end{bmatrix} \tag{29}
$$
$$
D = \mathcal{C} = \begin{bmatrix} 1 & 0 & 0 \end{bmatrix}
$$

with $m_1 = -2m_0 = 0.285$, $b = 14.28$, $a = 9$, and $\mathcal{F}(\eta_1(t)) = (1/2)\,(|\eta_1 + 1| - |\eta_1 - 1|)$ belongs to the sector $[0, 1]$. First, to evaluate the effectiveness of the proposed guaranteed cost PD controller, we apply the design procedure described in Theorem. We set $\epsilon_1 = 0.01$, $\epsilon_2 = \epsilon_3 = 0.02$. Setting $Q_2 = 0.5, Q_1 = I$ and $\nu = 0.1\,|\tanh(t)| + 0.8$ that is, $\nu_1 = 0.8$, $\nu_2 = 0.1$. Using the parameters $\mu = 0.2$ and $\lambda = 1$, we obtain

$$
\bar{P} = \begin{pmatrix} 0.4946 & -0.0051 & -0.0449 \\ -0.0051 & 0.0374 & 0.0329 \\ -0.0449 & 0.0329 & 0.4926 \end{pmatrix}
$$
$$
X = \begin{pmatrix} 0.0125 & -0.0015 & -0.0027 \\ -0.0027 & 0.0053 & -0.0033 \\ 0.0002 & 0.0031 & 0.0058 \end{pmatrix}
$$
$$
Z = \begin{pmatrix} 0.0095 & 0.0001 & -0.0025 \\ -0.0011 & 0.0069 & -0.0054 \\ 0.0012 & 0.0027 & 0.0057 \end{pmatrix},\; \bar{T} = 0.1354
$$

The design procedure yields the gain matrices

$$
K_1 = \begin{bmatrix} 0.0247 & -0.0054 & 0.0019 \end{bmatrix}^T
$$
$$
K_2 = \begin{bmatrix} 0.0190 & -0.0023 & 0.0039 \end{bmatrix}^T
$$

The distinct initial conditions for the master and slave systems are chosen as $\eta(0) = \begin{bmatrix} 0.2 & -0.3 & 0.2 \end{bmatrix}^T$ and $Y(0) = \begin{bmatrix} 0.4 & 0.1 & 0.6 \end{bmatrix}^T$, respectively. The actual cost achieved by the proposed controller is computed using the cost functional in (8).



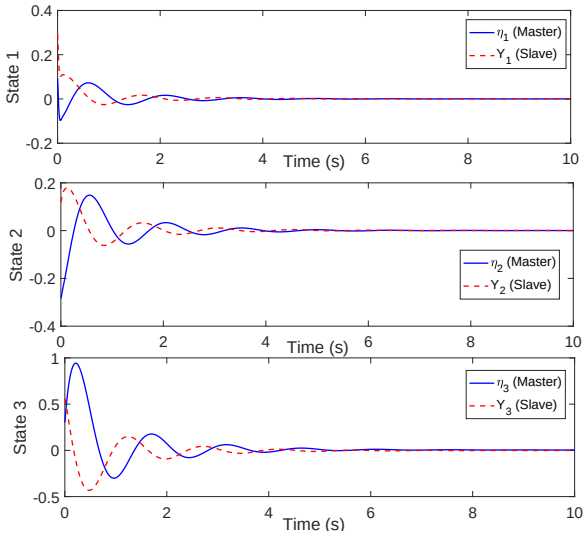


Fig. 1. Master and slave state trajectories.

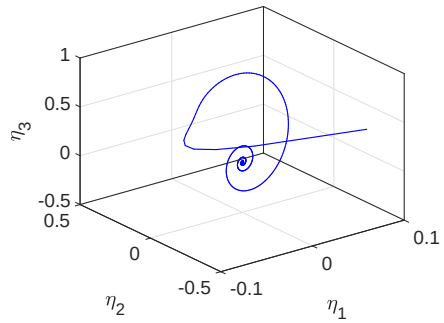

(a)

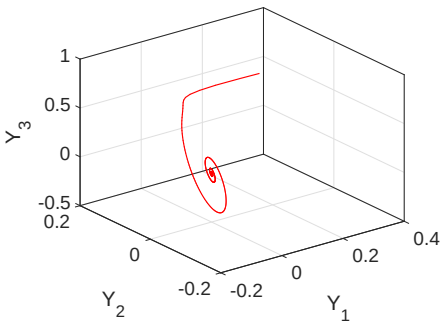

(b)

Fig. 2. Chaotic attractors of master and slave systems.

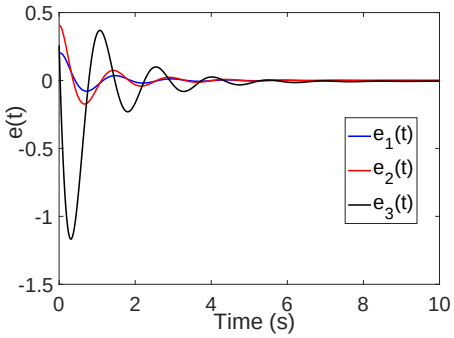


Fig. 3. Synchronization errors.

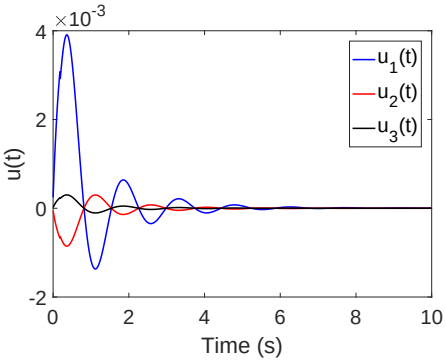


Fig. 4. Control input signals.

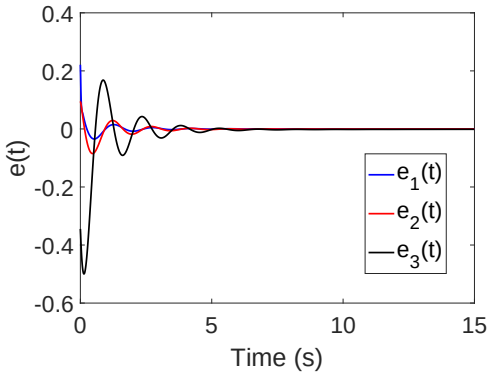


Fig. 5. Synchronization errors for the proposed controller.

For this example, the achieved cost is $J = 13.5928$, while the guaranteed bound is $J^* = 28.5496$, confirming that $J < J^*$. The results are presented in Figs. 1–4. Figure 1 depicts the master and slave state trajectories, where it is clearly observed that the slave states converge to the master states over time, confirming the effectiveness of the proposed synchronization scheme. Figure 2 illustrates the chaotic attractors of master and slave systems, respectively, demonstrating that both systems exhibit similar chaotic behavior and that the slave system successfully tracks the master dynamics. The synchronization error resulting from these gains is depicted in Fig. 3, which clearly shows that the error converges to zero asymptotically. This confirms that master-slave synchronization is successfully achieved. Figure 4 illustrates the control input signals confirming the practical applicability of the proposed controller. Next, to demonstrate the superiority and effectiveness of the proposed guaranteed cost PD controller, we compared our approach with a relevant existing method from the literature [28]. The comparison was performed under identical conditions, including the same system parameters and initial conditions. Notice that our method handles VFO $\nu(t)$, whereas the existing method assumes a constant FO. Despite this additional

complexity, and despite the presence of input delay, our method achieves a settling time of 8 seconds compared to 10 seconds for the existing method. These results are illustrated in Fig. 5, confirm the superiority of the proposed method, even under more challenging conditions.

VI Conclusion

The synchronization of VFOLSs in a master-slave configuration has been thoroughly investigated using a delayed PD feedback controller. The guaranteed cost control technique has been employed to derive synchronization conditions for the entire system. To validate the theoretical results, the design has been successfully applied to a representative example, namely the VFO Chua's circuit. It should be emphasized that the proposed control design is developed for nominal VFOLSs without parametric uncertainties. The robustness analysis against uncertainties and the determination of the maximum allowable uncertainty are not addressed in this paper and remain as potential directions for future research.

References

[1] Liao, T.L., Tsai, S.H., Adaptive synchronization of chaotic systems and its application to secure communications, *Chaos, Solitons & Fractals*, vol. 11, no. 9, pp. 1387–1396, 2000.

[2] Alfi, A., Kalat, A.A., Khooban, M.H., Adaptive fuzzy sliding mode control for synchronization of uncertain non-identical chaotic systems using bacterial foraging optimization, *Journal of Intelligent & Fuzzy Systems*, vol. 26, no. 5, pp. 2567–2576, 2014.

[3] Wu, X., Wang, H., Lu, H., Modified generalized projective synchronization of a new fractional-order hyperchaotic system and its application to secure communication, *Nonlinear Analysis: Real World Applications*, vol. 13, no. 3, pp. 1441–1450, 2012.

[4] Brown, R., Kocarev, L., A unifying definition of synchronization for dynamical systems, *Chaos: An Interdisciplinary Journal of Nonlinear Science*, vol. 10, no. 2, pp. 344–349, 2000.

[5] Hasler, M., *et al.*, Synchronization principles and applications, *Circuits and Systems Tutorials*, pp. 314–327, 1994.

[6] Wu, C.W., Chua, L.O., A unified framework for synchronization and control of dynamical systems, *International Journal of Bifurcation and Chaos*, vol. 4, no. 4, pp. 979–998, 1994.

[7] Shahverdiev, E.M., Sivaprakasam, S., Shore, K.A., Lag synchronization in time-delayed systems, *Physics Letters A*, vol. 292, no. 6, pp. 320–324, 2002.

[8] Ansari, M.S.H., Malik, M., Projective synchronization of fractional order quaternion valued uncertain competitive neural networks, *Chinese Journal of Physics*, vol. 88, pp. 740–755, 2024.

[9] Li, L., Xiao, L., Zuo, Q., Song, Q., A predefined-time approximate-convergence neural dynamics controller for function projective lag synchronization of complex-valued chaotic systems and its application, *IEEE Transactions on Automation Science and Engineering*, vol. 23, pp. 5652–5663, 2026.

[10] Cao, J., Li, H.X., Ho, D.W.C., Synchronization criteria of Lur'e systems with time-delay feedback control, *Chaos, Solitons & Fractals*, vol. 23, no. 4, pp. 1285–1298, 2005.

[11] Feng, Q.S., Zhang, S.L., Tang, M.L., Liu, X.G., Synchronization of Quaternion Lur'e Systems Based on Event-Triggered Control, *Circuits, Systems, and Signal Processing*, pp. 1–31, 2025.

[12] H.Z. Wang, *et al.*, Exponential synchronization of chaotic Lur'e systems using sampled-data proportional-integral controller and its application on Chua's circuits, *IEEE Transactions on Circuits and Systems I: Regular Papers*, vol. 72, no. 9, pp. 4789–4799, 2025.

[13] Lisbôa, C., Flores, J.V., Moreira, L.G., Gomes da Silva Jr, J.M., Event-triggered saturating control for synchronization of Lur'e type complex dynamic networks, *International Journal of Robust and Nonlinear Control*, vol. 36, no. 4, pp. 2184–2198, 2026.

[14] Aghayan, Z.S., Alfi, A., Machado, J.A.T., Robust stability of uncertain fractional order systems of neutral type with distributed delays and control input saturation, *ISA Transactions*, vol. 111, pp. 144–155, 2021.

[15] Aghayan, Z.S., Alfi, A., Mousavi, Y., Fekih, A., Stability analysis of a class of variable fractional-order uncertain neutral-type systems with time-varying delay, *Journal of the Franklin Institute*, vol. 360, no. 14, pp. 10517–10535, 2023.

[16] Yalçin, M.E., Suykens, J.A.K., Vandewalle, J., Master–slave synchronization of Lur'e systems with time-delay, *International Journal of Bifurcation and Chaos*, vol. 11, no. 6, pp. 1707–1722, 2001.

[17] Jajarmi, A., Akbarian, M., Baleanu, D., Analysis and backstepping control of a novel 4D fractional chaotic oscillator, *Mathematical Methods in the Applied Sciences*, vol. 48, no. 16, pp. 14750–14762, 2025.

[18] Baleanu, D., *et al.*, A new fractional model and optimal control of a tumor-immune surveillance with non-singular derivative operator, *Chaos: An Interdisciplinary Journal of Nonlinear Science*, vol. 29, no. 8, 2019.

[19] Ebrahimzadeh, A., Jajarmi, A., Yavuz, M., Fractional optimal control of anthroponotic cutaneous leishmaniasis with behavioral and epidemiological extensions, *Mathematical and Computational Applications*, vol. 30, no. 6, pp. 122, 2025.

[20] Akbarian, M., Baleanu, D., Yavuz, M., Jajarmi, A., An innovative method for stability assessment in fractional-order systems via higher-order Lyapunov derivatives, *Discrete and Continuous Dynamical Systems-S*, vol. 30, pp. 269–294, 2026.

[21] Alfi, A., Aghayan, Z.S., Lopes, A.M., Stabilization of Uncertain Fractional-Order Neutral-Type Delay Systems, *Academic Press*, Elsevier, 2025.

[22] Lopes, A.M., Alfi, A., Chen, L., David, S.A., *et al.* Fractional calculus: theory and applications, *MDPI-Multidisciplinary Digital Publishing Institute*, 2024.

[23] Patnaik, S., Hollkamp, J.P., Semperlotti, F., Applications of variable-order fractional operators: a review, *Proceedings. Mathematical, Physical, and Engineering Sciences*, vol. 476, no. 2234, pp. 20190498, 2020.

[24] Aghayan, Z.S., Alfi, A., Lopes, A.M., Disturbance observer-based delayed robust feedback control design for a class of uncertain variable fractional-order systems: Order-dependent and delay-dependent stability, *ISA Transactions*, vol. 138, pp. 20–36, 2023.

[25] Diaz, G., Coimbra, C.F.M., Nonlinear dynamics and control of a variable order oscillator with application to the van der Pol equation, *Nonlinear Dynamics*, vol. 56, no. 1, pp. 145–157, 2009.

[26] Aghayan, Z.S., Alfi, A., Mousavi, Y., Fekih, A., Criteria

for stability and stabilization of variable fractional-order uncertain neutral systems with time-varying delay: Delay-dependent analysis, *IEEE Transactions on Circuits and Systems II: Express Briefs*, vol. 70, no. 9, pp. 3393–3397, 2023.

[27] Kiruthika, R., Manivannan, A., Robust sampled-data synchronization of chaotic fractional variable order neural networks with time delays, *The European Physical Journal Special Topics*, vol. 234, no. 8, pp. 1645–1658, 2025.

[28] Jin, X.C., Lu, J.G., Novel master-slave synchronization conditions for chaotic fractional-order Lur'e systems based on small gain theorem, *IEEE Transactions on Circuits and Systems II: Express Briefs*, vol. 68, no. 6, pp. 2187–2191, 2020.

[29] Ahmad, I., Saaban, A B., Ibrahim, A.B., Shahzad, M., Global chaos synchronization of new chaotic system using linear active control, *Complexity*, vol. 21, no. 1, pp. 379–386, 2015.

[30] Pahnehkolaei, S.M.A., Alfi, A., Machado, J.A.T., Chaos suppression in fractional systems using adaptive fractional state feedback control, *Chaos, Solitons & Fractals*, vol. 103, pp. 488–503, 2017.

[31] Jiang, B., Lou, J., Lu, J., Shi, K., Synchronization of chaotic neural networks: Average-delay impulsive control, *IEEE Transactions on Neural Networks and Learning Systems*, vol. 33, no. 10, pp. 6007–6012, 2021.

[32] Sun, J., Shan, Z., Liu, P., Wang, Y., Backstepping synchronization control for three-dimensional chaotic oscillatory system via DNA strand displacement, *IEEE Transactions on NanoBioscience*, vol. 22, no. 3, pp. 511–522, 2022.

[33] Lee, T.H., Park, J.H., Lee, S.M., Kwon, O.M., Robust synchronisation of chaotic systems with randomly occurring uncertainties via stochastic sampled-data control, *International Journal of Control*, vol. 86, no. 1, pp. 107–119, 2013.

[34] Chang, S.S.L., Peng, T., Adaptive guaranteed cost control of systems with uncertain parameters, *IEEE Transactions on Automatic Control*, vol. 17, no. 4, pp. 474–483, 1972.

[35] Aghayan, Z.S., Alfi, A., Machado, J.A.T., Guaranteed cost-based feedback control design for fractional-order neutral systems with input-delayed and nonlinear perturbations, *ISA Transactions*, vol. 131, pp. 95–107, 2022.

[36] Aghayan, Z.S., Alfi, A., Mousavi, Y., Kucukdemiral, I. B., Fekih, A. , Guaranteed cost robust output feedback control design for fractional-order uncertain neutral delay systems, *Chaos, Solitons & Fractals*, vol. 163, pp. 112523, 2022.

[37] Mohammadi, L., Alfi, A., Xu, B., Robust bilateral control for state convergence in uncertain teleoperation systems with time-varying delay: a guaranteed cost control design, *Nonlinear Dynamics*, vol. 88, no. 2, pp. 1413–1426, 2017.

[38] Binh, T. N., Huu Sau, N., Thi Thanh Huyen, N., Thuan, M. V., Guaranteed cost control of delayed conformable fractional-order systems with nonlinear perturbations using an event-triggered mechanism approach, *International Journal of Systems Science*, vol. 56, no. 12, pp. 2991–3008, 2025.

[39] Lin, T.C., Lee, T.Y., Chaos synchronization of uncertain fractional-order chaotic systems with time delay based on adaptive fuzzy sliding mode control, *IEEE Transactions on Fuzzy Systems*, vol. 19, no. 4, pp. 623–635, 2011.

[40] Tavazoei, M.S., Haeri, M., Synchronization of chaotic fractional-order systems via active sliding mode controller, *Physica A: Statistical Mechanics and its Applications*, vol. 387, no. 1, pp. 57–70, 2008.

[41] Qi, F., Qu, J., Chai, Y., Chen, L., Lopes, A.M., Synchronization of incommensurate fractional-order chaotic systems based on linear feedback control, *Fractal and Fractional*, vol. 6, no. 4, pp. 221, 2022.

[42] Alfi, A., Chaos suppression on a class of uncertain nonlinear chaotic systems using an optimal H_∞ adaptive PID controller, *Chaos, Solitons & Fractals*, vol. 45, no. 3, pp. 351–357, 2012.

[43] Rajagopal, K., Guessas, L., Karthikeyan, A., Srinivasan, A., Adam, G. , Fractional order memristor no equilibrium chaotic system with its adaptive sliding mode synchronization and genetically optimized fractional order PID synchronization, *Complexity*, vol. 2017, no. 1, pp. 1892618, 2017.

[44] Guo, H., Zhong, S., Gao, F., Design of PD controller for master–slave synchronization of Lur'e systems with time-delay, *Applied Mathematics and Computation*, vol. 212, no. 1, pp. 86–93, 2009.

[45] Yin, C., Zhong, S.M., Chen, W.F., Design PD controller for master–slave synchronization of chaotic Lur'e systems with sector and slope restricted nonlinearities, *Communications in Nonlinear Science and Numerical Simulation*, vol. 16, no. 3, pp. 1632–1639, 2011.

[46] Aghayan, Z.S., Alfi, A., Mousavi, Y., Fekih, A., Robust delay-dependent output-feedback PD controller design for variable fractional-order uncertain neutral systems with time-varying delays, *IEEE Transactions on Systems, Man, and Cybernetics: Systems*, vol. 55, no. 3, pp. 1986–1996, 2025.

[47] Ji, D.H., Park, J.H., Lee, S.M., Koo, J.H., Won, S.C., Synchronization criterion for Lur'e systems via delayed PD controller, *Journal of Optimization Theory and Applications*, vol. 147, no. 2, pp. 298–317, 2010.

[48] Chen, W.H., Wang, L.L., Li, D.X., Lu, X. , Robust impulsive guaranteed cost control of uncertain Chaotic Lur'e Systems, In: *2010 International Conference on Electrical and Control Engineering*, pp. 1838–1842, 2010.

[49] Valério, D., Da Costa, J.S., Variable-order fractional derivatives and their numerical approximations, *Signal Processing*, vol. 91, no. 3, pp. 470–483, 2011.

[50] Park, J.H., Choi, K., Guaranteed cost control of uncertain nonlinear neutral systems via memory state feedback, *Chaos, Solitons & Fractals*, vol. 24, no. 1, pp. 183–190, 2005.

[51] Wang, C., Zhou, X., Shi, X., Jin, Y., Delay-dependent and order-dependent LMI-based sliding mode H_∞ control for variable fractional order uncertain differential systems with time-varying delay and external disturbance, *Journal of the Franklin Institute*, vol. 359, no. 15, 7893-7912, 2022.

[52] Boyd, S., El Ghaoui, L., Feron, E., Balakrishnan, V., *Linear matrix inequalities in system and control theory*, SIAM, 1994.

[53] Liao, X., Chen, G., Sanchez, E.N., LMI-based approach for asymptotically stability analysis of delayed neural networks, *IEEE Transactions on Circuits and Systems I: Fundamental Theory and Applications*, vol. 49, no. 7, pp. 1033–1039, 2002.

[54] Wen, Y., Zhou, X.F., Zhang, Z., Liu, S., Lyapunov method for nonlinear fractional differential systems with delay, *Nonlinear Dynamics*, vol. 82, no. 1, pp. 1015–1025, 2015.

[55] Li, C.P., Deng, W.H., Xu, D., Chaos synchronization of the Chua system with a fractional order, *Physica A: Statistical Mechanics and Its Applications*, vol. 360, no. 2, pp. 171–185, 2006.